


CORE DRILLS & STANDS



**MILWAUKEE
4094
SHEAR PIN
MOTOR**

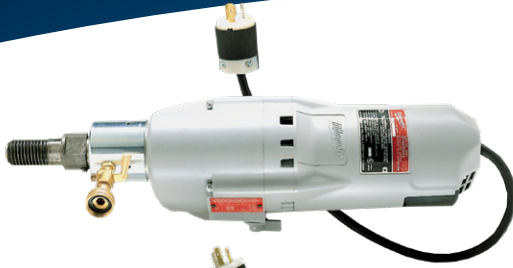

**MILWAUKEE
4096
SLIP CLUTCH
MOTOR**

OUR MOST POPULAR DRILL!


- 20A motor
- Clutch protection extends the life of gears and motor
- Two speeds: 450 and 900 rpm
- Built-in water swivel



**HCD2200
CORE DRILL**

"The Mongoose Drill" designed to drill up to 6" diameter mongoose bits and 3" diameter wet bits

- Adjustable length shoulder stock
- Locking trigger
- Slip clutch for operator safety
- 16' - 14 gauge SJT cord
- Water feed with shutoff
- 18mm thread w/ adapters
- 360° adjustable side handle

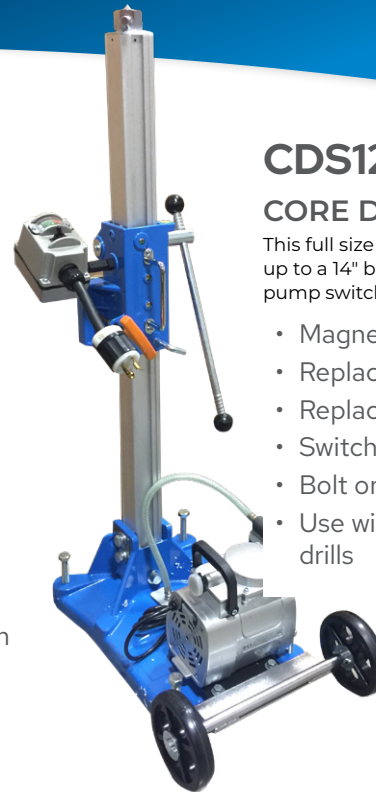

**CDS12VC
CORE DRILL STAND**

This full size combination stand handles up to a 14" bit. Includes stand, vacuum pump switch box and spacer block

- Magnesium column
- Replaceable steel rack
- Replaceable bronze guides
- Switch box
- Bolt or vacuum base
- Use with 4094 or 4096 drills

**HCDDS
CORE DRILL STAND**

Compact drill stand for hand held core drills

- Magnesium column
- Replaceable steel rack
- Replaceable polymer guides
- Dual side raise/lower
- Bolt-down base for secure mounting
- 60mm replaceable collar
- Dual "doughnut" holders
- Adjustable leveling screws
- Use with HCD2200 drill



CORE DRILLS - TECHNICAL SPECS			
MODEL	4094	4096	HCD2200
Weight	24 lbs (11kg)		9 lbs (4kg)
Voltage	120V		110V
No-Load rpm	450 - 900		0 - 2200
AMPS	20		13A
Spindle	1.25" - 7"		-
Max hp	4.8		-

DRILL STANDS - TECHNICAL SPECS		
MODEL	HCDDS	CDS12VC
Column Length	24" (61cm)	42" (107cm)
Column Diameter	2" x 2" (5x5cm)	3" x 3" (8x8cm)
Weight w/out Motor	6 lbs (2.7kg)	112 lbs (51kg)
Max Bit Diameter	-	14" (36cm)
Motor Weight	-	24 lbs (11kg)
Motor	-	110V / 20A
Vacuum Pump	-	110V / 4A